



What to specify...


1. Model

3. Pre-filter

4. Main filter

1	2 Tip Fume Extraction Unit	
<b>Voltage</b>	<b>230V ±10%</b>	
<b>Vacuum Control</b>	<b>072120</b>	
Wattage	0.135 kW	
Frequency	50Hz / 60 Hz	
Cabinet height	275 mm	
Cabinet width (not inc hose)	286 mm	
Cabinet depth (not inc hose)	291 mm	
Cabinet weight (inc filters)	9.8 Kg	
Construction	Stainless Steel	
Construction	Precision engineered brushed stainless steel units. High performance continuous run brushless motors. Quick and simple to relocate.	


**3 Replacement Pre-filter Pad**



*Options:*  
F5 Pack of 4 (std)  
F6 Pack of 4


*Code:*  
200225  
200226

**4 Replacement Main filter**



*Options:*  
HEPA/Chemical (std)

*Code:*  
110507

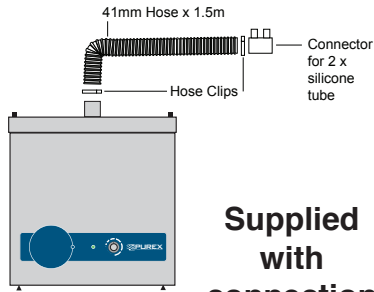



41mm Hose x 1.5m  
Hose Clips  
Connector for 2 x silicone tube

**Supplied with connection kit**



**Options: Iron kits (Pg 32-33)**

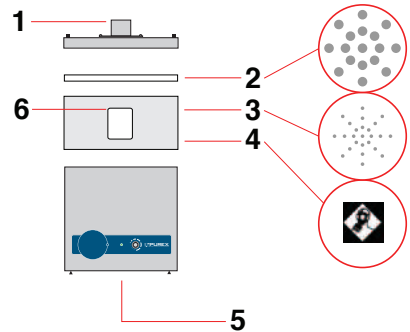

**Legend:**  
 1) Air inlet - 38mm ID - 40mm OD  
 2) Prefilter.  
 3) Main Filter (HEPA location).  
 4) Main Filter (Carbon location).  
 5) Clean air returned to workplace.  
 6) Filter identification label.

### Controls & System Features...

- Run LED
- Speed Control
- Low capital and running costs
- Quick change pre-filters deliver longer filter life
- Submicronic (HEPA) filtration removes 99.997% of particles down to 0.3 microns
- Activated carbon filtration removes harmful gas
- Simple to install and quiet in operation
- Easy to relocate
- Precision made from stainless steel

### Includes:

- 1 x Main filter
- 1 x Pre-filter pad
- 1 x Power cable
- 1 x Connection kit
- 1 x End cap

### Accessories

Please see the accessories section at the back of this brochure.